

THE FIRST EVER OMNI-DIRECTIONAL, GLASS, DUAL-MODE, 10-YEAR WARRANTY TUBE


FEATURES

1. Dual mode: works in existing T8 instant start ballasts or directly to line voltage AC100-277v.
2. 330° degree beam angle
3. Made with glass which offers a better, cleaner light
4. High CRI - up to 90 CRI available
5. 2ft, U-Tube and 4ft sizes available
6. Available in 3000K to 5000K color temps
7. 50,000 hr. life
8. 10 yr warranty
9. Shatter-proof option available



TECHNICAL PARAMETERS

1. Works with any T8 instant start ballast or direct voltage
2. Standard length: 2ft, U-Tube or 4ft
3. Rated input voltage AC100-277v, 50-60Hz, maximum input voltage: 277v AC
4. Light efficiency: up to 140lm/W (frost cover)
5. PF (power factor): >0.90

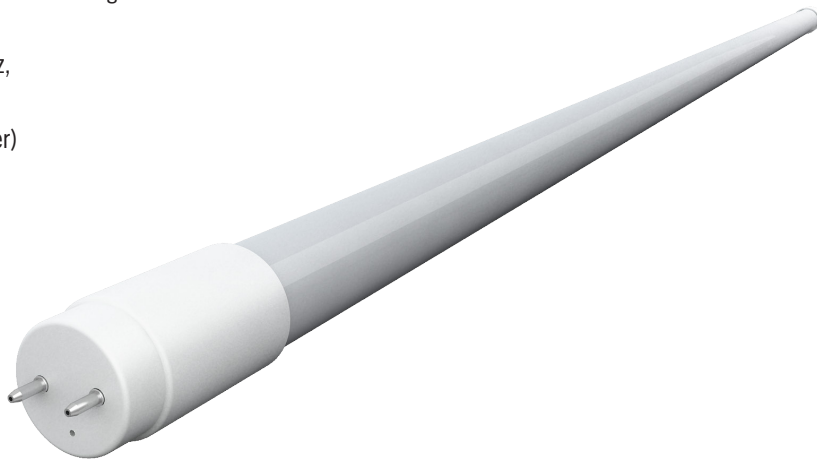

MODEL NUMBER	COLOR TEMP	LENGTH	WATTS	LUMENS
LT2F-10W-WW	3000K	2ft	10W	1400
LT2F-10W-CW	4000K	2ft	10W	1400
LT2F-10W-DW	5000K	2ft	10W	1400
LT4F-12W-WW	3000K	4ft	12W	1680
LT4F-12W-CW	4000K	4ft	12W	1680
LT4F-12W-DW	5000K	4ft	12W	1680
LT4F-18W-WW	3000K	4ft	18W	2250
LT4F-18W-CW	4000K	4ft	18W	2250
LT4F-18W-DW	5000K	4ft	18W	2250
LTXUF-12W-WW	3000K	U-Tube	12W	1800
LTXUF-12W-CW	4000K	U-Tube	12W	1800
LTXUF-12W-DW	5000K	U-Tube	12W	1800





FEATURES

1. Dual mode: works in existing T8 instant start ballasts or directly to line voltage AC100-277v.
2. 330° degree beam angle
3. Made with glass which offers a better, cleaner light
4. High CRI - up to 90 CRI available
5. 2ft, U-Tube and 4ft sizes available
6. Available in 3000K to 5000K color temps
7. 50,000 hr. life
8. 10 yr warranty
9. Shatter-proof option available

TECHNICAL PARAMETERS

1. Works with any T8 instant start ballast or direct voltage
2. Standard length: 2ft, U-Tube or 4ft
3. Rated input voltage AC100-277v, 50-60Hz, maximum input voltage: 277v AC
4. Light efficiency: up to 140lm/W (frost cover)
5. PF (power factor): >0.90



T8/T12 REPLACEMENT

MODEL NUMBER	COLOR TEMP	LENGTH	WATTS	LUMENS
LTYF-22W-WW	3000K	4ft	22W	3080
LTYF-22W-CW	4000K	4ft	22W	3080
LTYF-22W-DW	5000K	4ft	22W	3080
LT4F-25W-WW	3000K	4ft	25W	3650
LT4F-25W-CW	4000K	4ft	25W	3650
LT4F-25W-DW	5000K	4ft	25W	3650

TS REPLACEMENT

MODEL NUMBER	COLOR TEMP	LENGTH	WATTS	LUMENS
LTT5-27W-WW	3000K	4ft	27W	3780
LTT5-27W-CW	4000K	4ft	27W	3780
LTT5-27W-DW	5000K	4ft	27W	3780

